
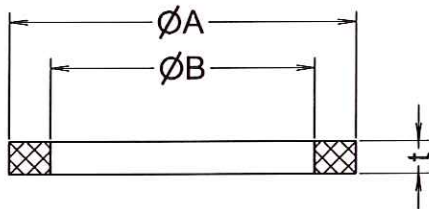





Part No.	75x50-G	75-G	100-G	125-G	150-G	200-G	250-G	300-G	400-G	500-G	600-G	
Size	mm	20x15	20	25	32	40	50	65	80	100	125	150
	inches	0.75x0.5	0.75	1	1.25	1.5	2	2.5	3	4	5	6
ØA		35	35	40	49	56	67	79	94.5	124	150	179
ØB		22	22	27	35	41	51	60	76	102	124	152
t		5.54	5.54	6.35	6.35	6.35	6.35	6.35	6.35	6.35	6.35	6.35

Units:mm


ガスケットの寸法は,A-A-59326規格に基づいてます。

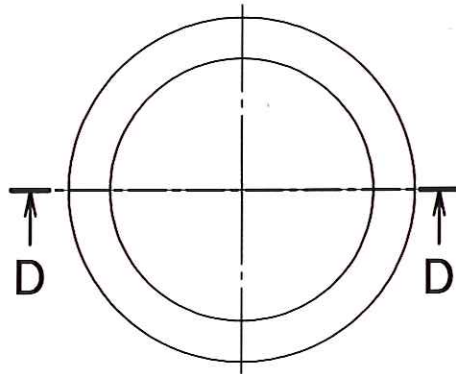

Section D-D

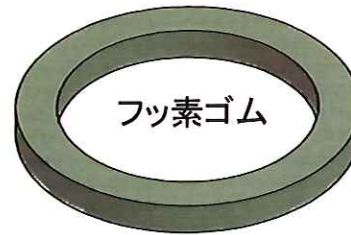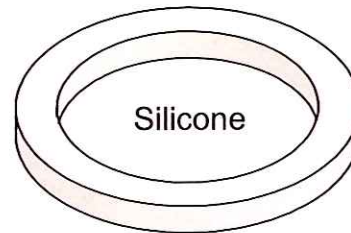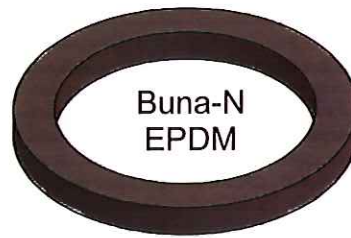

Buna-Nの仕様	
引張強さ	MPa>10.78
伸び	>180%
永久歪み	<10%
硬度	50'-55'

1	ガスケット	フッ素ゴム	1	標準品
		Silicone		
		EPDM		
		Buna-N		
ITEM	PART NAME	MATERIAL	Q'TY	REMARKS
CUSTOMER		TITLE		
		MAX-LOK		
		Gaskets (ゴム系)		
DATE	SCALE	DRAW	APPR	
May.12'03	none	ToMo		
DWG No.			3	 FULLNESS JAPAN CORPORATION.
MAX-GAS-150-03				